


# TRANQUILITY® 30 DIGITAL (TE)

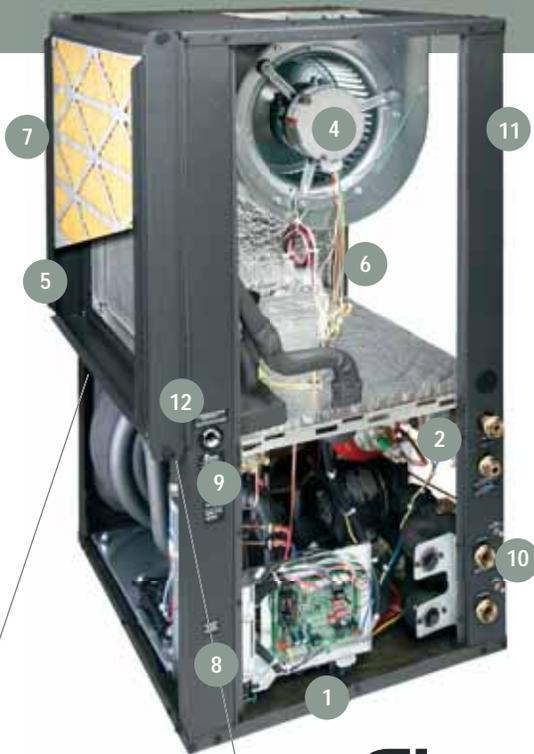

**vFlow™**  
Variable Water Flow

**iGate™**  
monitor. control. diagnose.

The Tranquility® 30 Packaged Geothermal Heat Pump delivers the ULTIMATE in efficiency (30 EER and 4.8 COP\*), comfort, reliability and serviceability – intelligently driven by the iGate™, the industry's first two-way communicating control, two-stage compressor, variable-speed fan and industry-first vFlow™ internal variable water flow components. The Tranquility® 30 also delivers reliable operation, lower operating cost and compact installation.

The Tranquility® 30 qualifies for 30% tax credit by exceeding ENERGY STAR® Tier 3 requirements. All in all, the SMARTEST and Most Efficient\*\* solution to heat, cool and provide hot water for your home.

\* Rated at Ground Loop Conditions ISO 13256-1

\*\* Recognized as Most Efficient of ENERGY STAR 2012

- 5 Tin-Plated Copper or Microchannel Air Coils for higher reliability
- 6 Foil-Faced Insulation in the blower section and fully insulated compressor section conform to ASHRAE 62 specifications
- 7 Two-inch high-efficiency MERV 11 Filter (standard) or EarthPure® Air Cleaner for high quality indoor air
- 8 Two-Section Swing-out/Drop-Out Control Box design provides wide-open service access
- 9 Refrigerant Schrader Ports located on bracket at the front access panel for easy service access
- 10 Water Schrader Ports located on corner post to easily read pressure drop across water heat exchanger for easy troubleshooting
- 11 Heavy Gauge Galvanized Steel Cabinet is epoxy powder-coated in a durable and attractive stainless steel finish
- 12 Designed for External Condensate P-Trap to eliminate internal drain-line cleanouts

## Features

- 1 Exclusive iGate™ uses the power of 2-way communication to monitor, control and diagnose your system. It improves system life by monitoring and protecting the unit and delivers high efficiency by intelligently controlling the unit.
- 2 vFlow™ Variable Water Flow with Variable-Speed Internal Flow Center or Internal Modulating Valve for optimized efficiency, reliability and quicker, easier, cleaner installation
- 3 Next generation Copeland™ Ultra-Tech™ Two-Stage Scroll Compressor with dual-level isolation for ultra-quiet and high-efficiency operation
- 4 Emerson UltraTech® Variable-Speed Communicating Fan Motor with soft start and constant CFM control

## Application Flexibility

- Five capacities 026, 038, 049, 064 and 072
- Entering water temperature operation range 20-120°F
- iGate™ – Monitor, control and diagnose digitally from the thermostat
- vFlow™ – Connect geo source directly to the loop
- Ground loop, ground water and water loop applications
- Internal electric heat unit (optional) designed for easy field construction
- Optional Warranty - Extend labor allowance from the standard 5 years to 10 years.



CLIMATEMASTER® GEOTHERMAL HEAT PUMP SYSTEMS

SMART | RESPONSIBLE | COMFORTABLE

# Tranquility® 30 Digital (TE)

## Performance and Specifications

Tranquility® TE ISO Ratings


AHRI/ISO/ASHRAE 13256-1




Model	Capacity Modulation	Water Loop Heat Pump				Ground Water Heat Pump				Ground Loop Heat Pump			
		Cooling 86°F		Heating 68°F		Cooling 59°F		Heating 50°F		Cooling Full Load 77°F Part Load 68°F		Heating Full Load 32°F Part Load 41°F	
		Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP	Capacity Btuh	EER Btuh/W	Capacity Btuh	COP
TE026	Part	19,100	19.6	22,100	6.5	22,000	35.3	17,700	5.3	20,900	28.0	15,300	4.6
	Full	25,300	17.7	30,400	5.7	28,700	27.3	24,800	5.0	26,300	19.9	18,900	4.0
TE038	Part	27,000	19.5	31,800	6.4	31,300	34.4	26,100	5.4	30,400	29.6	23,200	4.8
	Full	38,000	17.8	45,100	5.8	43,300	27.1	37,200	5.2	39,900	20.3	29,200	4.4
TE049	Part	36,500	19.4	43,600	6.3	42,000	34.3	35,000	5.1	40,300	27.9	30,100	4.4
	Full	48,700	17.3	59,700	5.5	55,800	26.1	48,400	4.8	50,800	19.3	37,200	4.0
TE064	Part	46,300	18.7	54,700	6.0	53,100	32.4	44,000	5.0	51,200	26.7	38,100	4.4
	Full	61,500	16.2	77,400	5.4	71,500	24.4	63,200	4.8	66,200	18.8	48,700	3.9
TE072	Part	53,000	16.8	64,600	5.2	60,800	28.6	53,200	4.5	58,100	23.2	46,000	3.9
	Full	68,300	15.1	85,300	4.8	77,700	22.5	71,400	4.4	71,700	16.9	55,800	3.7

### Dimensional Data


Horizontal Model		Overall Cabinet			Vertical Upflow Model		Overall Cabinet			Vertical Downflow Model		Overall Cabinet		
		A Width	B Depth	C Height			A Width	B Depth	C Height			A Width	B Depth	C Height
TE026	in	22.4	62.2	19.3	TE026	in	22.4	25.6	48.5	TE026	in	22.4	25.6	52.5
TE038	in	25.4	71.2	21.3	TE038	in	25.4	30.6	50.5	TE038	in	25.4	30.6	54.5
TE049	in	25.4	76.2	21.3	TE049	in	25.4	30.6	54.5	TE049	in	25.4	30.6	58.5
TE064	in	25.4	81.2	21.3	TE064	in	25.4	30.6	58.5	TE064	in	25.4	30.6	62.5
TE072	in	25.4	81.2	21.3	TE072	in	25.4	30.6	58.5	TE072	in	25.4	30.6	62.5

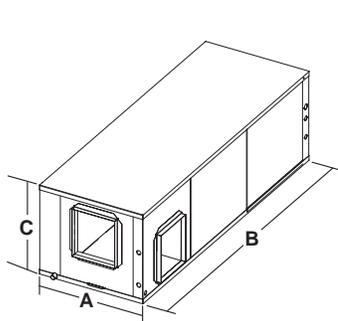

Horizontal Model

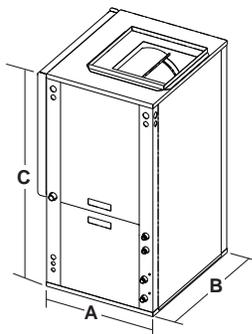

Vertical Upflow Model

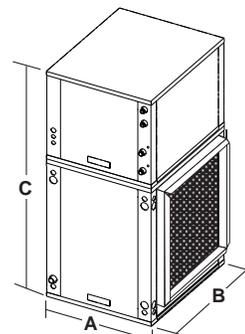

Vertical Downflow Model



7300 S.W. 44th Street  
Oklahoma City, OK 73179  
Phone: 405-745-6000  
Fax: 405-745-6058  
climatemaster.com | cmdealernet.com

ClimateMaster works continually to improve its products. As a result, the design and specifications of each product at the time for order may be changed without notice and may not be as described herein. For specific information on the current design and specifications go to [cmdealernet.com](http://cmdealernet.com). Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateMaster's opinion or commendation of its products.

ClimateMaster is a company of LSB Industries, Inc. New York Stock Exchange Symbol: LXU

The management system governing the manufacture of ClimateMaster's products is ISO 9001:2000 certified.



Intertek

